



Mobile tradespeople
Professional field workers
Maintenance workers
Food vendors



Utility vehicles
Off-road enthusiasts
Campers
Anglers



Technical data

Handiwash

Fully automatic units are available.

Water capacity
8.5 litres


Water level sight
glass

Hot and Cold taps

Low Power
consumption

10 Amps @12 Volt
7.2 Amps @24 Volt

Hot and cold water

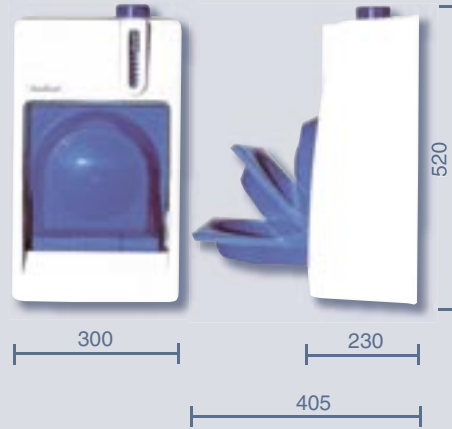

Miniwash

Fully automatic units are available.

Water capacity
6.0 litres


Water level sight
glass

Hot tap only

Low Power
consumption

9.6 Amps @12 Volt
7.2 Amps @24 Volt

Hot water only

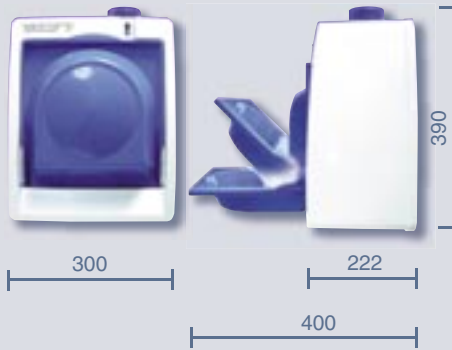

Eberspächer Handiwash units carry a full 12 month warranty.

Handiwash is type approved and **CE** approved.

Conforms to ELV directives.

Eberspächer (UK) Ltd. Headlands Business Park,
Salisbury Road, Ringwood, Hampshire BH24 3PB
Tel: +44(0)1425 480151 – Fax: +44(0)1425 480152
Email: enquiries@eberspacher.com
Internet: www.eberspacher.com

Specifications subject to change without notice. Patent Pending.

Automotive handwash systems

Mobile handwash for mobile people

Handiwash

Miniwash




Eberspächer

Automotive handwash systems

Hot and cold water at any location is now an affordable reality.

Eberspächer are proud to announce what is undoubtedly the most compact, easy to install and technologically advanced mobile handwash unit. We now feature fully automatic versions of both Handiwash and Miniwash, making installation even easier.

For anyone whose work brings them into contact with hazardous substances, or unhygienic conditions, it should be considered a necessity.

Extensively used by major companies, Eberspächer Handwash Units can assist you in meeting occupational health and safety requirements.



Handiwash

(Automatic version if required)

Water level indicator

Indicator lamp

Quality hot and cold taps
Maintenance free

Fold down wash basin

High impact housing

Moulded from tough, UV resistant polymers suitable for internal and external applications.

Low power, heavy duty heater element

Using high corrosion resistant materials and state of the art electronics, the heater element thermostatically controls water temperature to 60°C. The system is also protected by a thermal overload safety device.

Easy installation

Unit can be easily mounted to any vertical surface and wired to a 12 volt power source, 24 volt systems are available.

Allows easy filling

Indicator lamp

Water level indicator

Quality hot tap
Maintenance free

Optional lift out bowl available on both models.

Miniwash

(Automatic version if required)

Miniwash features a single tap / single temperature operation, thermostatically controlled to 49°C. The system is also protected by a thermal overload safety device. Miniwash is ideal for small van applications and features a three way port drain.



Mobile handwash for mobile people