



# Tow-Trust Towbars

Important: Please read General Notes overleaf before fitting



Issue 3

## TMi1SN MITSUBISHI OUTLANDER 2012>


Item	Qty	Description	Item	Qty	Description
A	1	Crossmember	D	2	15mm Spacer Plates
B	2	Chassis Brackets	E	4	M12 x 120 Bolts, Nuts & 4 S/P Washers
C	1	ACS2 / 9202 Swan Neck	F	10	M8 x 25 Bolts (10.9), 8 Nyloc Nuts & 10 S/P Washers
X	1	Spare wheel Cage Bracket	G	4	M10 x 40 Bolts, Nuts & S/P Washers
			H	2	M12 x 110 Grade 10.9 Bolts & Nyloc Nuts
			J	12	12 x 25 Flat Washers
			K	10	8 x 25 Flat Washers
			L	4	10 x 25 Flat Washers
			M	1	VASP8 L/H Socket Plate

### BUMPER REMOVAL:

1. Remove the rear light clusters, two fixings on each light. Remove the rear bumper two fixings each side of boot opening, three fixings in each wheel arch and one tip fixing behind each wheel arch liner. One fixing along lower edge by each wheel arch. Pull bumper rearwards to release from vehicle. Cut the rear bumper 80mm wide x 10mm deep.
2. Remove the rear impact beam. (This is not refitted with the Towbar assembly, please hand back to customer).

### TOWBAR INSTALLATION:

1. Lower the exhaust and remove the towing eyelet. (This is not refitted with the Towbar assembly, please hand back to customer).
2. Lower the spare wheel and remove the wheel from the carrier. Unbolt the carrier from the N/S chassis member and discard the fixings. Using Item F with Item K bolt Item X to the chassis member noting orientation. Using Item F with Item K bolt the carrier back to Item X.
3. Using Item E with Item J fix Items B to each chassis member.
4. Fix Item A to the rear panel using Items F with Items K.
5. Using Item G with Item L fix Item A to Items B.
6. Using Item H with Item J and Item D fix Item C and Item M to Item A.
7. Fully tighten all fixings until Towbar is rigid, square and secure.
8. Refit the rear bumper, lights and raise the spare wheel (Please note rotate carrier hook 180 degrees and use forward most bar to rehang spare wheel carrier).

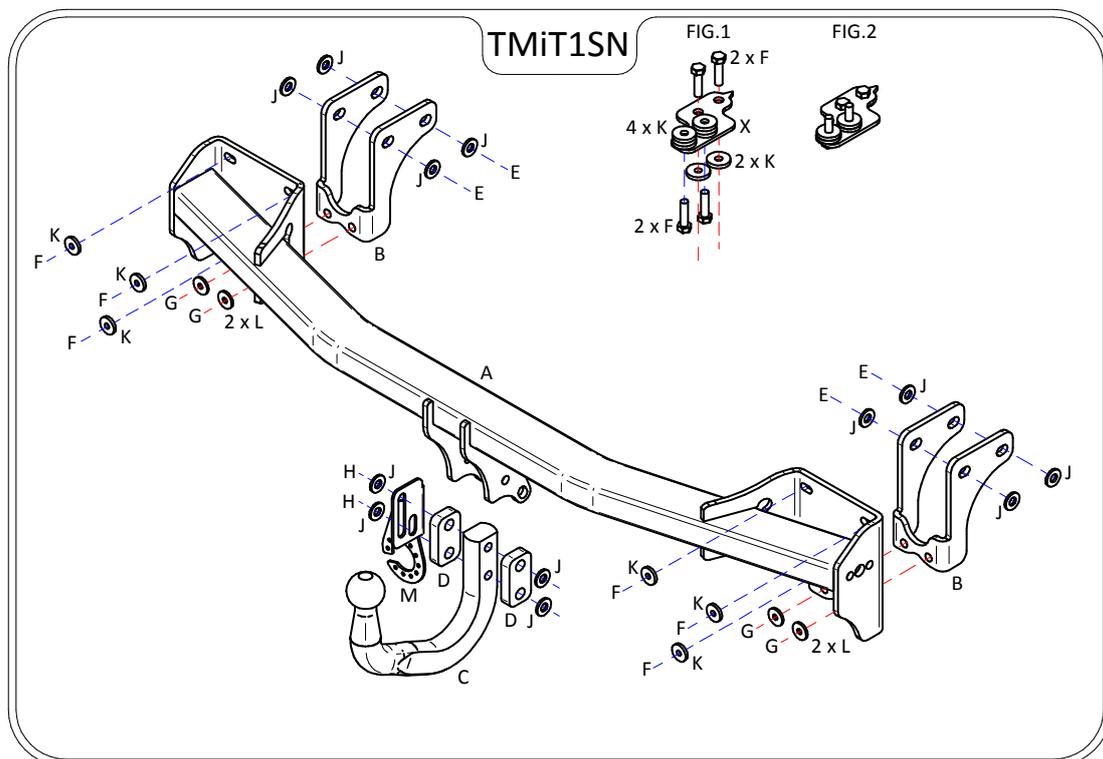

### Note:

1. Recommended Torque Setting for M12 Grade 10.9 -139 Nm. (For other Torque Settings see notes overleaf.)
2. Nose load limits and vehicle manufacturers trailer / caravan weight limits must be observed.