



FITTING INSTRUCTION

SZ5058

Batch 000000

Suzuki Grand Vitera (3 Door)

Type Approval Number e11 00-9614

COMPONENTS

ITEM	QTY	DESCRIPTION
A	1	Towbar
B	1	Swan Neck (ZC1515)
B1	2	Spacer Block (15mm Thick)
C	1	Mounting Plate (L/H)
D	1	Mounting Plate (R/H)
E	2	Chassis Brace
EP	1	Electrical Mounting Plate (ZM1390)

BOLT PACK

ITEM	QTY	DESCRIPTION
G	2	M12 x 100 Bolts & Nyloc Nuts
H	4	M12 x 40 Bolts & Nyloc Nuts
I	8	M12 x 40 x 1.25 Fine Pitch Bolts & Washers
J	2	M10 x 120 Bolts, Nuts & Washers
K	8	M12 H/D Washer – 30mm O/D x 5mm Thick
L	1	M12 Flat Washer – 23mm O/D x 1.6mm Thick
M	4	M10 Flat Washer – 21mm O/D x 1.6mm Thick
N	2	Spacer Tubes – 14mm O/D x 92mm Long
O	2	Rubber Blanking Grommets – 30mm O/D

FITTING PROCEDURE

- ⇒ **NOTE:** The installation of this towbar involves drilling to the plastic bumper skin (Option 1). These drilled holes are visible when the rear door is opened. This method is specified by Suzuki. Alternatively, the bumper can be removed (Option 2) and refitted over the top of bolts (J).
- ⇒ Remove towing eye from right hand chassis rail, and discard. Unclip wiring harness from chassis where it comes into contact with items (C) & (D). Lower the exhaust heat shield by removing the two screws on its rearmost edge to gain access to mountings (J).
- ⇒ Option 1: Using illustration, drill the top face of the plastic bumper skin (11mm dia.). Continue by drilling the top surface of the rear crossmember (11mm dia.). Open up top face of plastic bumper skin to 30mm dia.
- ⇒ Option 2: Remove bumper skin. Using illustration, drill the top surface of the rear crossmember (11mm dia.).
- ⇒ Insert spacer tubes (N) from below and loosely attach chassis braces (E) using bolts (J) with washers (M) under both the bolt heads and nuts.
- ⇒ Loosely attach mounting plates (C) & (D) to existing captive nuts in underside and outside wall of vehicle chassis using bolts (I). Use heavy duty washers (K) under the bolt heads.
- ⇒ Insert towbar (A) between mounting plates (C) & (D) and loosely attach using bolts (H). At the uppermost positions attach chassis braces (E).
- ⇒ Tighten all bolts ensuring all components remain level & square.
- ⇒ Option 1: Fit rubber blanking grommets (O) to the holes in the bumper skin.
- ⇒ Option 2: Refit bumper over the top of bolt heads (J). The lower bumper fixings may need slotting to accommodate for the top edge of the bumper being higher.
- ⇒ Loosely attach swan neck (B) & electrical mounting bracket (EP) to towbar (A) using bolts (G), with 1 spacer block (B1) at each side of swan neck (B). **The electrical mounting bracket carries type approval information required by law and must always be fitted as shown.** Use washer (L) over the slotted hole on item (A).
- ⇒ Tighten bolts ensuring towball remains vertical. Reattach heat shield & wiring harness to chassis as required.

TIGHTEN ALL BOLTS**TORQUE SETTINGS**

ISO Coarse Pitch


M8=29Nm, M10=58Nm, M12=102Nm, M16=252Nm

ISO Fine Pitch

M8=31Nm, M10=61Nm, M12=111Nm

THE VEHICLE MANUFACTURER'S SPECIFICATION FOR THE TRAILER WEIGHT AND NOSE LOAD LIMITS MUST BE OBSERVED.

FITTING DIAGRAM

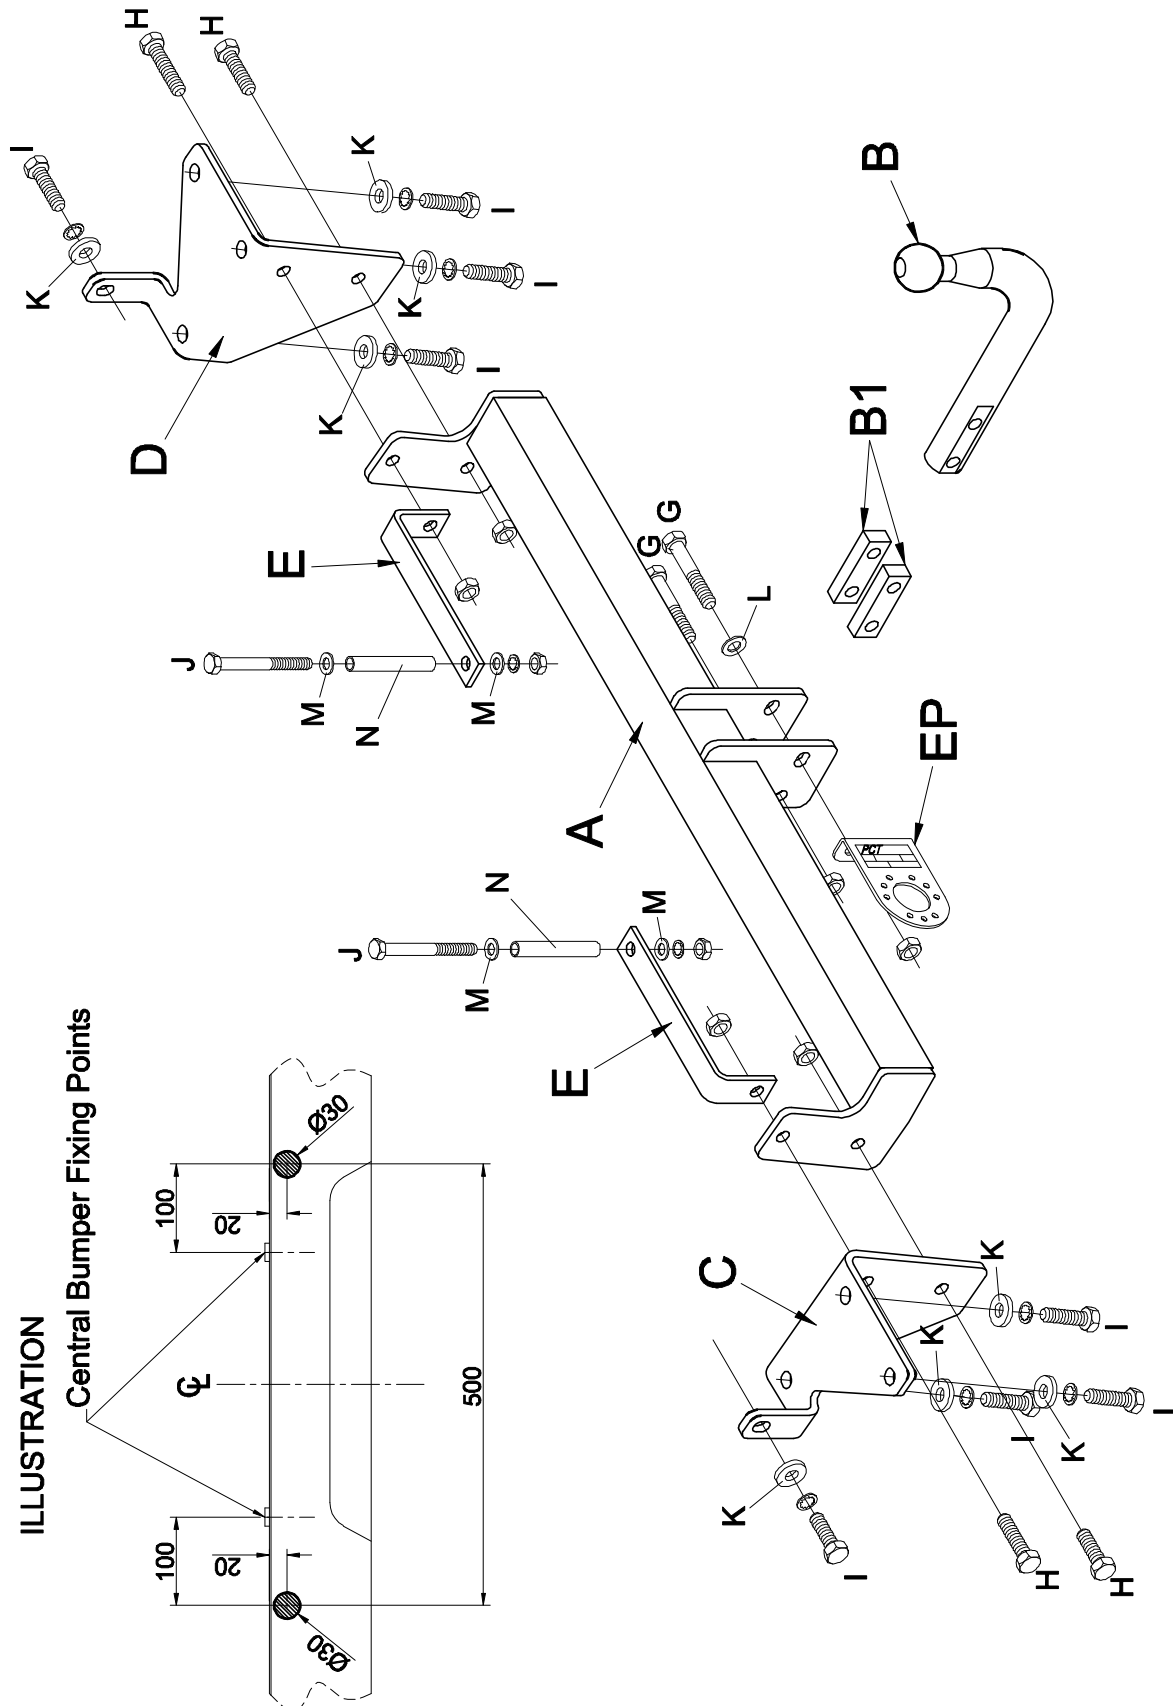

IMPORTANT PRODUCT INFORMATION & GUARANTEE

(TO BE RETAINED WITH THE VEHICLE AND PASSED TO SUBSEQUENT OWNERS)

Thank you for purchasing a PCT Automotive product. Please read the following information carefully before fitting or using your PCT Automotive product.

GUARANTEE

We shall free of charge either repair or at our option replace defective goods where the defects appear

- i. if the goods are a towbar manufactured by us, during the economic lifetime of the vehicle it was first fitted to
- ii. in the case of all other products manufactured by us, within 3 years following the date of your order

PROVIDED THAT (in each case) such defects shall be found to our reasonable satisfaction to have arisen substantially from our faulty design, workmanship or materials and have not arisen by reason of a failure to follow our instructions (whether written or oral), any modification, misuse, neglect or interference with the installation, any damage or abuse to the goods or vehicle by impact or vandalism or by a failure to carry out reasonable inspection, maintenance and/or adjustment.

At all times, the above guarantee is subject to our standard terms and conditions of sale a copy of which is available upon request from our offices.

TOWING LIMITS

Our towbars have been designed for towing up to the vehicle manufacturer's maximum recommended trailer weight and nose load limits for your model. Towing with gross weights above that recommended at any time will invalidate the guarantee and cancel any liability for damage. Towing a twin axle trailer, towing over rough ground or using a bicycle/motorcycle carrier, etc, exerts extreme loads on a towbar and extra care should be taken in these situations not to exceed the vehicle manufacturer's maximum recommended limits.

PRODUCT IDENTIFICATION MARK

Your product carries a product identification mark. This mark carries important product and batch code information and if the product is type approved it also carries the type approval details which are required by law. Under no circumstances should this mark be defaced, removed or damaged.

INSTALLATION, INSPECTION, MAINTENANCE AND ADJUSTMENT

GENERAL INSTALLATION

- ⇒ Products should only be fitted by competent persons.
- ⇒ Read the product fitting instructions carefully and check all components are included in the fitting kit before commencing installation.
- ⇒ Check vehicle for corrosion and/or accident damage. Towbars should not be fitted to any vehicle suffering from corrosion or accident damage or which is not in a roadworthy condition.
- ⇒ Clean off all road dirt, underseal and sound deadening mastic where parts are to fit to ensure correct seating of all components.
- ⇒ Bumper cut information is given as a guide only. Variations in models may occur therefore the fitter should always check that the bumper cut is necessary and of the correct size and shape before commencing with the cut.
- ⇒ All drilling swarf should be removed from the vehicle and all holes drilled in the vehicle should be treated with an appropriate rust inhibitor.
- ⇒ Do not fully tighten bolts before towbar is completely fitted unless instructed to do so in the fitting instruction, this will allow some variances to be overcome before final tightening of bolts.

PAINT & CORROSION

Towbars manufactured by PCT Automotive undergo a phosphate chemical pre-treatment prior to an epoxy/polyester powder coat finish being applied. For long lasting good looks and in order to prevent corrosion the towbar should be regularly inspected for paint damage and wherever necessary re-painted in an appropriate finishing paint or underseal. The vehicle should also be regularly checked for any corrosion that could affect the towbar installation. Towbars should not be used on any vehicle suffering from corrosion that could affect the towbar installation.

BOLTS

All towbar fixing bolts should be checked initially after the first 300 towing miles and then every 3,000 towing miles or to coincide with the vehicle manufacturer's recommended service intervals, whichever is the sooner, and should be tightened using an appropriate torque wrench to the settings specified in the towbar fitting instruction.

ELECTRICAL INSTALLATION, TEST/COMMISSIONING AND MAINTENANCE

Failure to comply with the following instructions may cause damage to the towing vehicle's wiring loom and/or towing electrics installation.

Where displacement tap connectors e.g. Scotchloks, are the preferred method of connection, always use the correct colour coded tap connector for the size of cable to which it is to be connected. PCT Automotive's manufactured relays with integral cables should be connected using red tap connectors (0.5mm² to 1mm², conductor cross sectional area).

After installation of the 12N/12S sockets, prior to testing, a water displacement agent e.g. WD40 should be applied into the rear connection void through the water drain hole at the bottom of the sockets and also into the front pins under the socket flap. This socket maintenance should be carried out at least twice a year in the spring and autumn.

The towing electrics test procedure must be undertaken with the engine running. If any of the towing relays fail to function correctly, with the engine running and no other vehicle electrical systems turned on, check that the voltage across the vehicle's battery is between 13V and 14V approx, if this voltage is not correct, check the condition of the vehicle's battery/alternator.

Always ensure that the trailer/caravan/lighting board's own electrical systems are installed and functioning correctly before coupling to the vehicle's 12N/12S sockets.

Every six months (spring and autumn recommended) the battery and alternator of the vehicle should be checked to determine correct electrical functioning. All connections of the electrical installation including the earth should be checked for mechanical soundness and electrical quality. Plugs, sockets, relays and fixings should be checked for water ingress, mechanical soundness, electrical quality and general wear and tear.

Please complete the following information to validate the guarantee and for future reference.

VEHICLE OWNER NAME & ADDRESS:

VEHICLE MAKE & MODEL:

VEHICLE REGISTRATION NUMBER:

FITTER NAME & ADDRESS:

DATE TOWBAR FITTED:

If you have any comments or suggestions about the PCT Automotive product fitted to your vehicle, please address them to
PCT Automotive, Holbrook Industrial Estate, Sheffield S20 3GH or email techsupport@pctautomotive.com
Your comments will help us in our aim to continually upgrade our products to meet the high standards expected by our customers.