



FITTING INSTRUCTION

TY5008

Batch 000000

Toyota Rav 4 (Vehicles Without Spare Wheel on Rear Door)

Type Approval Number e11 00-6474

COMPONENTS

ITEM	QTY	DESCRIPTION
A	1	Towbar
B	1	Swan Neck (ZC1524)
B1	2	2.5mm Spacers
C	1	Side Arm (L/H)
D	1	Side Arm (R/H)
E	1	Chassis Support Bracket (L/H)
F	1	Chassis Support Bracket (R/H)
G	1	Rear Support Bracket (L/H)
H	1	Rear Support Bracket (R/H)
I	1	Spreader Plate (L/H)
J	1	Spreader Plate (R/H)

BOLT PACK

ITEM	QTY	DESCRIPTION
M	2	M12 x 70 Bolts & Nyloc Nuts
N	4	M12 x 35 Bolts, Washers & 2 Nuts
O	8	M12 x 35 x 1.25 Fine Pitch Bolts & Washers
P	6	M8 x 30 Bolts, Nuts & Washers
Q	4	M12 H.D. Washers – 30mm o/d x 5mm Thick
R	4	M12 Washers – 23mm o/d x 2mm Thick
S	4	M8 H.D. Washers – 30mm o/d x 5mm Thick
T	8	M8 Washers – 16mm o/d x 1.6mm Thick

FITTING PROCEDURE

- ⇒ Remove bumper (5 push-in clips around top edge of bumper, 1 screw on R/H/S adjacent to the tailgate hinge, 2 push-in clips on lower edge of bumper, 3 small bolts in each wheelarch, 1 screw at base of each wheelarch, disconnect wiring plug on L/H/S, pull bumper tips out to release from plastic clips between bumper and body).
- ⇒ Remove rear impact beam from its support brackets (2 bolts at each end). Remove impact beam support brackets from the vehicle body (3 bolts on each). Remove and discard towing eye from chassis rail.
- ⇒ Loosely attach side arms (C) & (D) to the 4 forwardmost existing threaded fixings in the underside of each chassis rail using bolts (O) with heavy duty washers (Q) under the bolt heads. At the rearmost positions it is required to attach chassis support brackets (E) & (F) using bolts (O) with M12 washers (R) under the bolt heads. Loosely attach chassis supports (E) & (F) to existing threaded fixings in wall of chassis using bolts (O) with M12 washers (R) under the bolt heads.
- ⇒ Loosely attach rear support brackets (G) & (H) and impact beam support brackets to existing threaded nuts in rear panel using existing bolts (X) (Brackets (G) & (H) are sandwiched between the impact beam support brackets and the vehicle body).
- ⇒ Remove vents in side of vehicle to access mounting positions (P). Remove rubber bungs from (P). Insert spreader plates (I) & (J) through vent apertures and attach at existing holes using bolts (P) with washers (T) under the bolt heads and against chassis support brackets (E) & (F). Use heavy duty washers (S) at the outboard positions on the underside of the vehicle body. Note: Ensure plates (I) & (J) seat correctly by removing any underseal.
- ⇒ Insert towbar (A) between side arms (C) & (D) and loosely attach using bolts (N). Rear support brackets (G) & (H) also attach to towbar (A) at this point.
- ⇒ Tighten all bolts ensuring assembly remains level and square to the vehicle. Ensure impact beam support brackets relocate correctly.
- ⇒ Replace rear impact beam onto its support brackets. Replace vents. Replace bumper using reverse of above procedure.
- ⇒ Attach swan neck (B) to towbar (A) using bolts (M) with 1 spacer (B1) at each side of the swan neck. Tighten bolts ensuring the swan neck remains vertical.

TIGHTEN ALL BOLTS**TORQUE SETTINGS**

ISO Coarse Pitch


M8=29Nm, M10=58Nm, M12=102Nm, M16=252Nm

ISO Fine Pitch

M8=31Nm, M10=61Nm, M12=111Nm

THE VEHICLE MANUFACTURER'S SPECIFICATION FOR THE TRAILER WEIGHT AND NOSE LOAD LIMITS MUST BE OBSERVED.

FITTING DIAGRAM

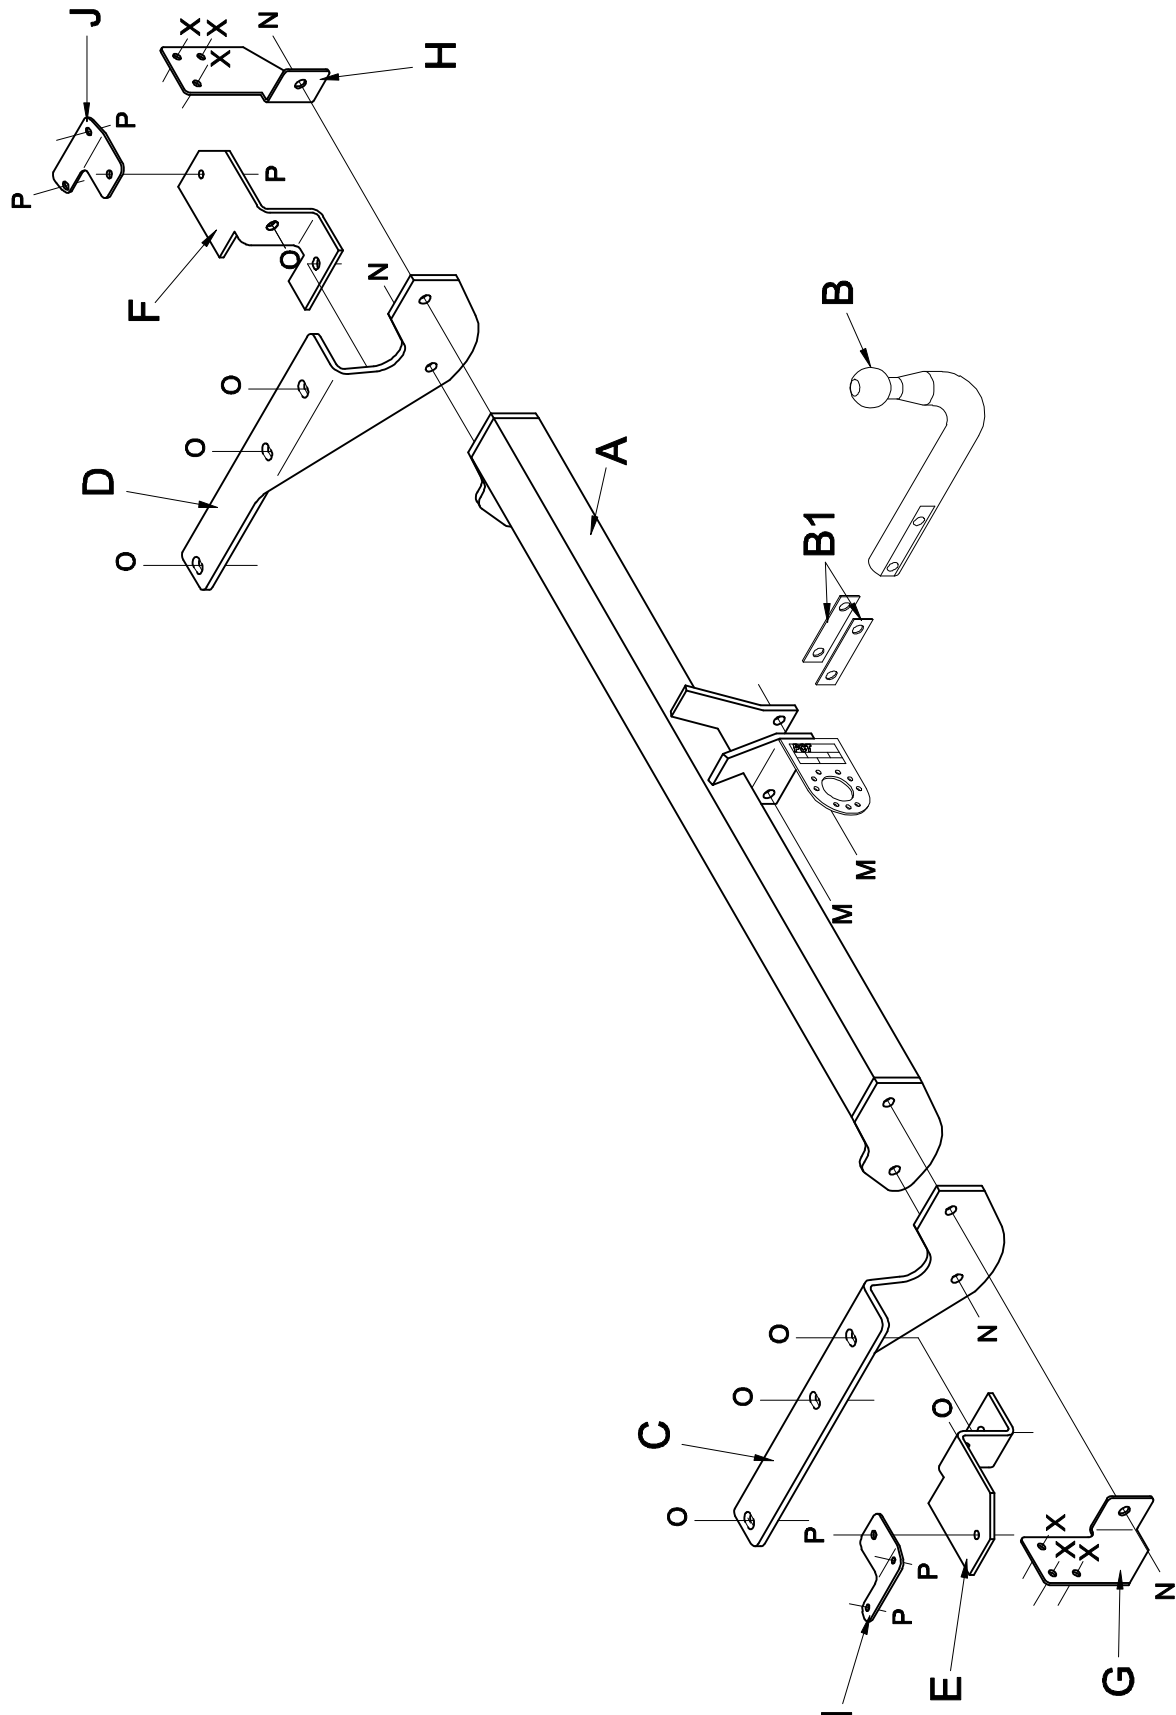

IMPORTANT PRODUCT INFORMATION & GUARANTEE

(TO BE RETAINED WITH THE VEHICLE AND PASSED TO SUBSEQUENT OWNERS)

Thank you for purchasing a PCT Automotive product. Please read the following information carefully before fitting or using your PCT Automotive product.

GUARANTEE

We shall free of charge either repair or at our option replace defective goods where the defects appear

- i. if the goods are a towbar manufactured by us, during the economic lifetime of the vehicle it was first fitted to
- ii. in the case of all other products manufactured by us, within 3 years following the date of your order

PROVIDED THAT (in each case) such defects shall be found to our reasonable satisfaction to have arisen substantially from our faulty design, workmanship or materials and have not arisen by reason of a failure to follow our instructions (whether written or oral), any modification, misuse, neglect or interference with the installation, any damage or abuse to the goods or vehicle by impact or vandalism or by a failure to carry out reasonable inspection, maintenance and/or adjustment.

At all times, the above guarantee is subject to our standard terms and conditions of sale a copy of which is available upon request from our offices.

TOWING LIMITS

Our towbars have been designed for towing up to the vehicle manufacturer's maximum recommended trailer weight and nose load limits for your model. Towing with gross weights above that recommended at any time will invalidate the guarantee and cancel any liability for damage. Towing a twin axle trailer, towing over rough ground or using a bicycle/motorcycle carrier, etc, exerts extreme loads on a towbar and extra care should be taken in these situations not to exceed the vehicle manufacturer's maximum recommended limits.

PRODUCT IDENTIFICATION MARK

Your product carries a product identification mark. This mark carries important product and batch code information and if the product is type approved it also carries the type approval details which are required by law. Under no circumstances should this mark be defaced, removed or damaged.

INSTALLATION, INSPECTION, MAINTENANCE AND ADJUSTMENT

GENERAL INSTALLATION

- ⇒ Products should only be fitted by competent persons.
- ⇒ Read the product fitting instructions carefully and check all components are included in the fitting kit before commencing installation.
- ⇒ Check vehicle for corrosion and/or accident damage. Towbars should not be fitted to any vehicle suffering from corrosion or accident damage or which is not in a roadworthy condition.
- ⇒ Clean off all road dirt, underseal and sound deadening mastic where parts are to fit to ensure correct seating of all components.
- ⇒ Bumper cut information is given as a guide only. Variations in models may occur therefore the fitter should always check that the bumper cut is necessary and of the correct size and shape before commencing with the cut.
- ⇒ All drilling swarf should be removed from the vehicle and all holes drilled in the vehicle should be treated with an appropriate rust inhibitor.
- ⇒ Do not fully tighten bolts before towbar is completely fitted unless instructed to do so in the fitting instruction, this will allow some variances to be overcome before final tightening of bolts.

PAINT & CORROSION

Towbars manufactured by PCT Automotive undergo a phosphate chemical pre-treatment prior to an epoxy/polyester powder coat finish being applied. For long lasting good looks and in order to prevent corrosion the towbar should be regularly inspected for paint damage and wherever necessary re-painted in an appropriate finishing paint or underseal. The vehicle should also be regularly checked for any corrosion that could affect the towbar installation. Towbars should not be used on any vehicle suffering from corrosion that could affect the towbar installation.

BOLTS

All towbar fixing bolts should be checked initially after the first 300 towing miles and then every 3,000 towing miles or to coincide with the vehicle manufacturer's recommended service intervals, whichever is the sooner, and should be tightened using an appropriate torque wrench to the settings specified in the towbar fitting instruction.

ELECTRICAL INSTALLATION, TEST/COMMISSIONING AND MAINTENANCE

Failure to comply with the following instructions may cause damage to the towing vehicle's wiring loom and/or towing electrics installation.

Where displacement tap connectors e.g. Scotchloks, are the preferred method of connection, always use the correct colour coded tap connector for the size of cable to which it is to be connected. PCT Automotive's manufactured relays with integral cables should be connected using red tap connectors (0.5mm² to 1mm², conductor cross sectional area).

After installation of the 12N/12S sockets, prior to testing, a water displacement agent e.g. WD40 should be applied into the rear connection void through the water drain hole at the bottom of the sockets and also into the front pins under the socket flap. This socket maintenance should be carried out at least twice a year in the spring and autumn.

The towing electrics test procedure must be undertaken with the engine running. If any of the towing relays fail to function correctly, with the engine running and no other vehicle electrical systems turned on, check that the voltage across the vehicle's battery is between 13V and 14V approx, if this voltage is not correct, check the condition of the vehicle's battery/alternator.

Always ensure that the trailer/caravan/lighting board's own electrical systems are installed and functioning correctly before coupling to the vehicle's 12N/12S sockets.

Every six months (spring and autumn recommended) the battery and alternator of the vehicle should be checked to determine correct electrical functioning. All connections of the electrical installation including the earth should be checked for mechanical soundness and electrical quality. Plugs, sockets, relays and fixings should be checked for water ingress, mechanical soundness, electrical quality and general wear and tear.

Please complete the following information to validate the guarantee and for future reference.

VEHICLE OWNER NAME & ADDRESS:

VEHICLE MAKE & MODEL:

VEHICLE REGISTRATION NUMBER:

FITTER NAME & ADDRESS:

DATE TOWBAR FITTED:

If you have any comments or suggestions about the PCT Automotive product fitted to your vehicle, please address them to
PCT Automotive, Holbrook Industrial Estate, Sheffield S20 3GH or email techsupport@pctautomotive.com
Your comments will help us in our aim to continually upgrade our products to meet the high standards expected by our customers.