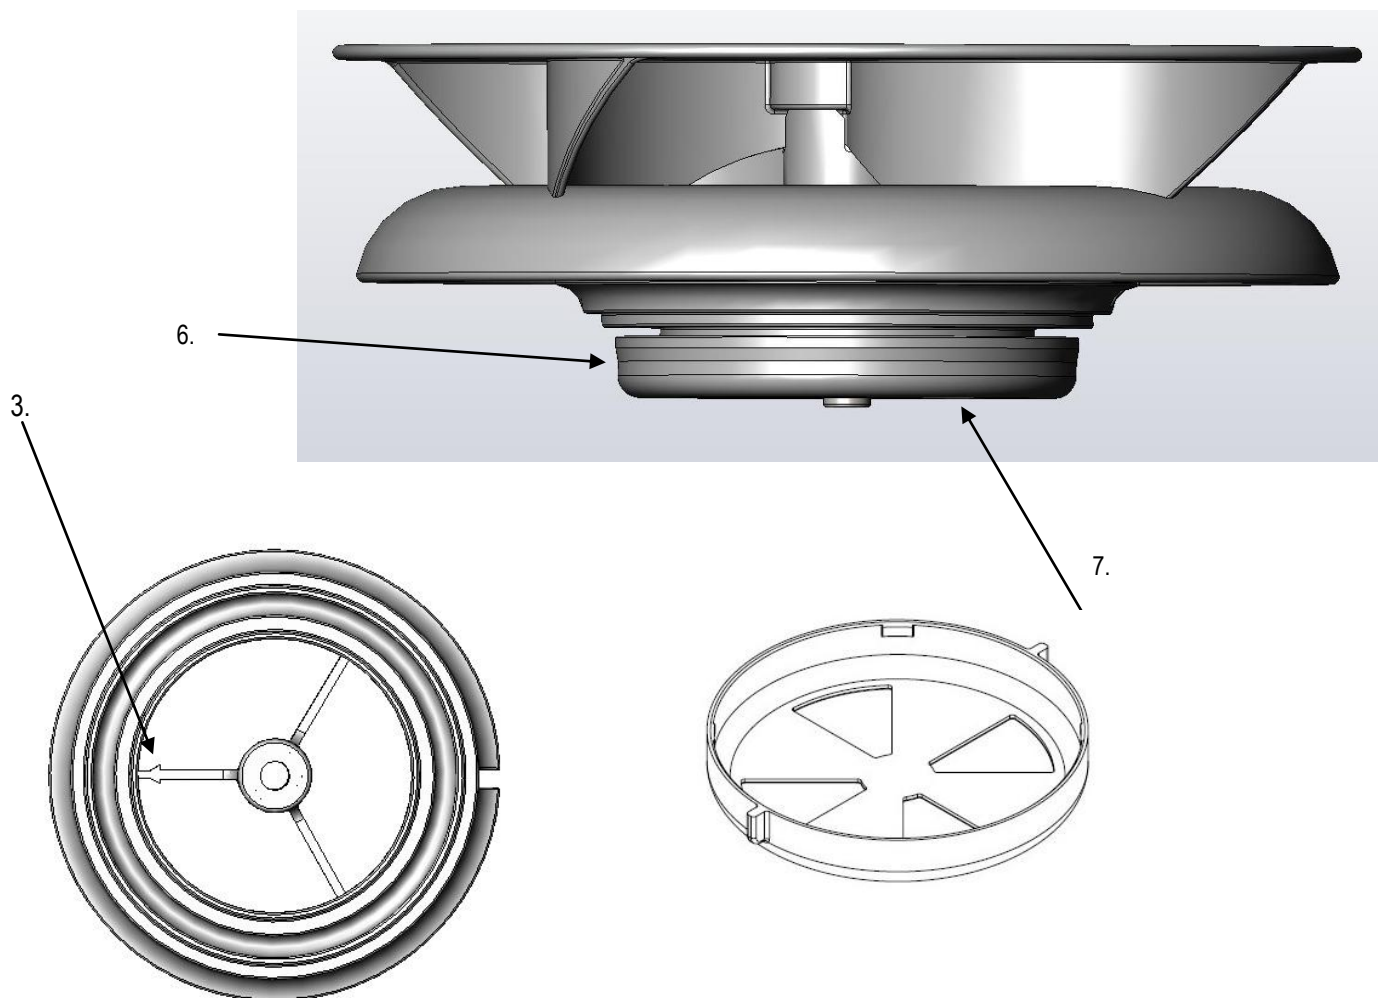

Veiligheidsvoorschriften

- Neem bij werkzaamheden op het dak altijd de veiligheid van de monteur in acht.

Installatie:

1. Maak een opening van $\varnothing 80$ mm in het dak
2. Verwijder alle scherpe randen, seal dan de zaagsnede in het dak om roesten te voorkomen
3. Plaats de ventilator recht boven het gat op het dak.
Let op: Plaats de ventilator in de juiste positie, met de pijl in de rijrichting (zie tekening 3.)
4. Zorg ervoor dat de ventilator wordt geplaatst op een vlak gedeelte van het dak.
5. Haal de juiste bout uit het montage setje. Gebruik M8 x 16 bij een dakdikte van 1 t/m 6 mm, Gebruik M8 bij 20 bij een dakdikte van 7 t/m 11 mm, Gebruik M8 x 25 bij een dakdikte van 12 t/m 17 mm
Let op: Doe de O-ring om de juiste stelbout!
6. Plaats de binnenring aan de binnenkant van het voertuig en monteer de binnenring met de stelbout in de ventilator. (zie foto 6.) **Let op: Minimaal 3 volledige slagen pakken**
7. Druk het afsluitrooster over de binnenring. Dit heeft de open / dicht functie. (Zie foto 7.)



Safety Considerations

- When working on a roof, attention to your personal safety should be adhered to at all times!

Installation Instructions:

1. Make a 80 mm Ø Diameter opening in the roof.
2. Remove any sharp edges and seal the inner edge to prevent corrosion.
3. Position the ventilator onto the cutout (roof top).
Attention: Place the ventilator in the right position, with the arrow to the front of the vehicle. (See Picture 3)
4. Make sure the ventilator is mounted on a flat area on the roof.
5. Select the correct bolt size required to suit the roof thickness. Use M8 x 16 for roof thickness of 1 - 6 mm, or M8 x 20 for roof thickness of 7 - 11 mm, or M8 x 25 for roof thickness 12 – 17 mm.
Attention: Fit the O-ring around the bolt.
6. Position the inner ring inside the vehicle and turn clockwise the screw into the ventilator. (see picture 6.)
Attention: Minimal 3 full rotations.
7. Push the valve (See picture 7) over the inner ring. This acts as the open / close valve.

